RoHS Compliant

REV	LTR	DESCRIPTION	DATE	REVISER	SHEET
A		NEW RELEASE	2019-05-08	JIANG. REN	1/1

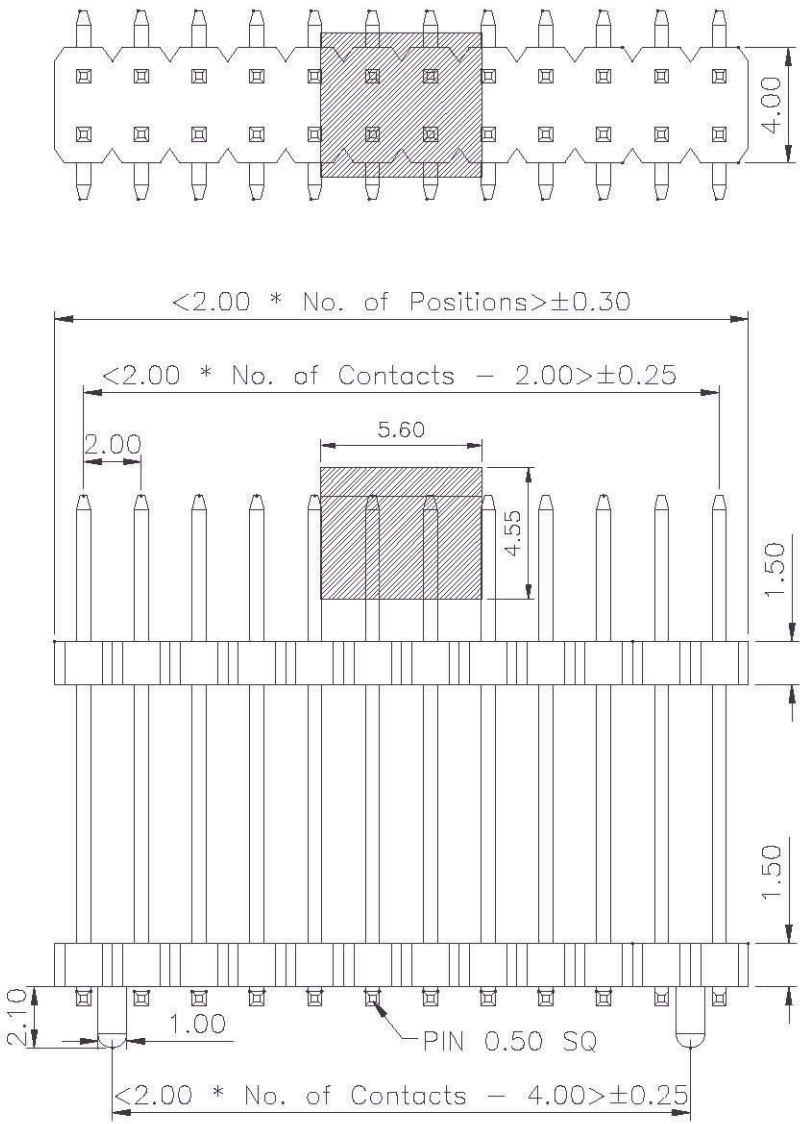

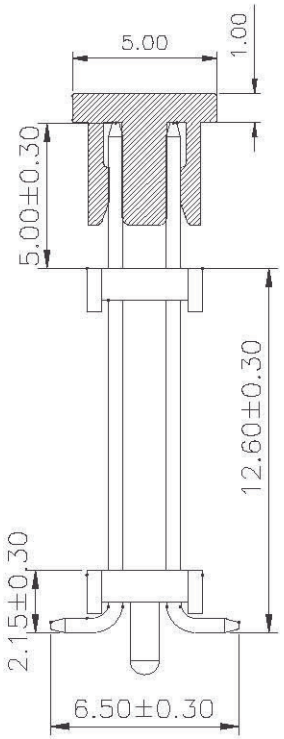

Specifications

Current Rating: 2.0Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V−0
Nylon 6T
All materials must be ROHS materials

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

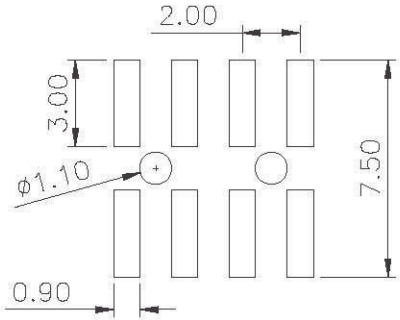

FrelTec GmbH

TOLERANCE		ANGLE	
.XXX	±0.10	.XXX°	±1.0°
.XX	±0.15	.XX°	±2.0°
.X	±0.25	.X°	±3.0°

TITLE: 2.00mm Pin Header Double Plastic Layers Two Rows SMT

PART NO.: 2C2PHT20212FUBLQ05D2

DRAWING NO.:

MOLD:	SCALE:	UNIT:	SIZE:	REV.
XXX	1 : 1	mm	A4	A

PROJECTION

APPROVED BY	CHECKED BY	DRAWING BY
LIANG. ZHUO	LIANG. ZHUO	JIANG. REN