
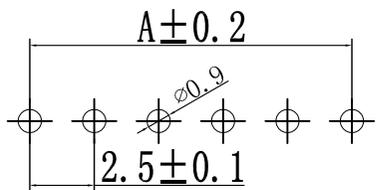
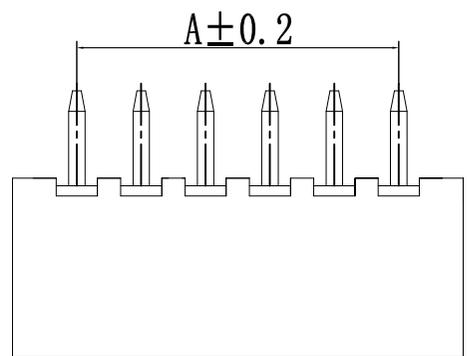
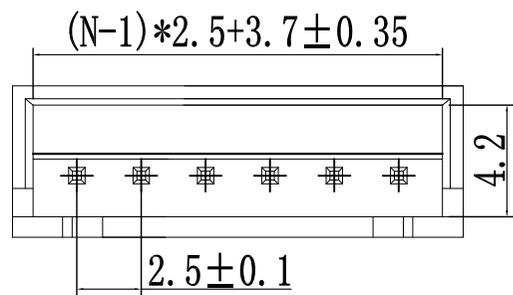
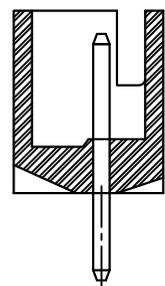
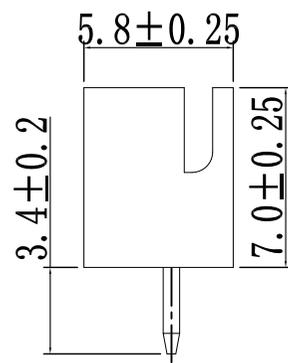


RoHS Compliant

REV	LTR	DISCRIPTION	DATE	REVISER	SHEET
A	/	NEW RELEASE	2016.06.21	Jiang REN	1/1

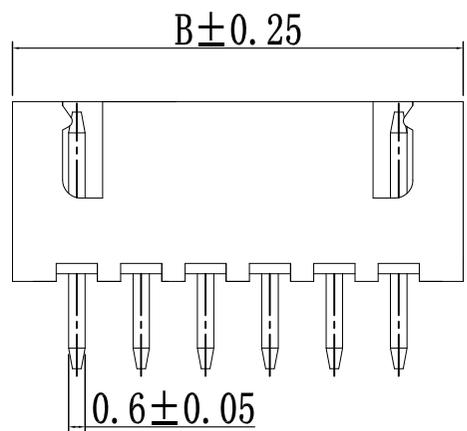

PCB LAYOUT

SPECIFICATIONS

- 1.Poles:2~16PIN
- 2.Pitch between poles:2.5MM
- 3.Current Rating:3A
- 4.Voltage Rating:250V AC,DC
- 5.Temperatuer Range:-25°C~+85°C
- 6.Contact Resistance:20mΩ Max
- 7.Insulation Resistance:1000MΩ Min
- 8.Withstanding Voltang:800V AC/minute

Material:
 Wafer:PA66(White),UL94V-0,
 PIN:Brass Tin-Plated

Circuits	Dimension(MM)		PCS/BAG
	A	B	PCS/BAG
2	2.50	7.50	1000
3	5.00	10.00	1000
4	7.50	12.50	1000
5	10.00	15.00	1000
6	12.50	17.50	1000
7	15.00	20.00	1000
8	17.50	22.50	1000
9	20.00	25.00	1000
10	22.50	27.50	1000
11	25.00	30.00	1000
12	27.50	32.50	1000
13	30.00	35.00	1000
14	32.50	37.50	1000
15	35.00	40.00	1000
16	37.50	42.50	1000

FrelTec GmbH

TOLERANCE	ANGLE	TITLE: Wafer connector 2.5mm pitch			
.XXX ±0.10	.XXX° ±1.0°	PART NO.: 2C2WSS25yxxTPWHC0166		DRAWING NO.: XHAF-16Dxx-C30W	
.XX ±0.15	.XX° ±2.0°	MOLD: xxx	SCALE: 1:1	UNIT: mm	SIZE: A4
.X ±0.25	.X° ±3.0°	APPROVED BY: Vegas LIU	CHECKED BY: Liang ZHUO	REV. A	
PROJECTION		DRAWING BY: Jiang REN			